

ROLLER'S Multi-Press 22 V ACC

Two connections for ROLLER'S manual radial press and ROLLER'S 32 kN radial presses





←ACC→
Automatic Circuit Control
with forced return
and pressure monitoring

German Top Quality



Smaller!
Only 35.5 cm!

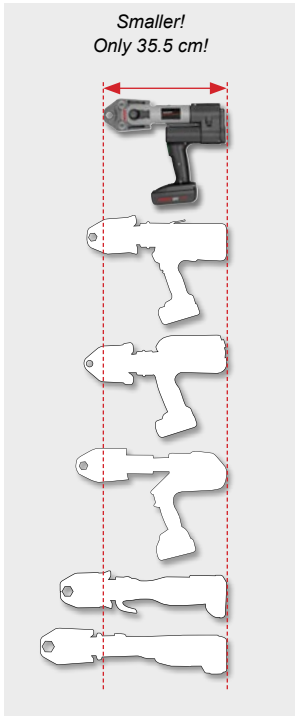

Cropping of threaded bars with ROLLER'S cropping tongs M



Cutting electric cables with ROLLER'S cable shears



Universal, handy, robust hybrid radial press 32 kN for cordless and mains operation, with automatic circuit control, pressure monitoring and result display. Anti-vibration system. For radial pressing joints $\varnothing 10-108$ (110) mm, $\varnothing \frac{1}{4}-4$ ". Li-Ion 22 V Technology! Li-Ion 21.6 V, 2.5 Ah battery for approx. 200 pressings per battery charge.

- Universal for all ROLLER'S pressing tongs (except ROLLER'S pressing tongs Mini) and ROLLER'S pressing rings, as well as for suitable pressing tongs / pressing rings of other makes.
- Compact, handy, extra light. Drive unit with battery pack weighs only 3.3 kg.
- Optimum weight distribution for one-hand operation. Drive unit with inserted pressing tongs can be put down on the battery ready to pick up.
- Ergonomically designed housing with soft grip handles.
- Drive unit with pressing tongs V15 only 35.5 cm long. Can therefore be used anywhere, free hand, over head, in confined spaces.
- Tilttable pressing tongs (through 360°) by housing on rotary bearing.
- Pressing process in inching mode with ACC – for work safety, functional safety and operating safety. Automatic return (forced return) after completed pressing.
- **Pressure monitoring and result display**
Electronic pressure sensor for thrust force monitoring. Pressure evaluation after the pressing process. Result display with 2-coloured white/red LED.
- **Anti-vibration system**
Special drive technology with weight compensation and soft grip handles, for low-vibration, fatigue-free pressing.
- Several tons feed and pressing force for perfect, split-second pressing. Thrust 32 kN. Robust, powerful, electrohydraulic drive with eccentric piston pump with robust planetary gear and compact high-performance hydraulic system. Constant shear force for constantly reliable pressing.
- Proven, powerful battery motor 21.6 V, 380 W output, safety switch.
- Integrated LED work light for illuminating the work place.
- **Li-Ion 22 V Technology**
Highly resistant Li-Ion 21.6 V batteries with 2.5, 5.0 or 9.0 Ah capacity, for long service life. Powerful and light. Li-Ion 21.6 V, 2.5 Ah for approx. 200 pressings, 5.0 Ah for approx. 400 pressings, 9.0 Ah for approx. 720 pressings Viega Profipress DN 15 per battery charge*. Graduated charging status indicator by coloured LEDs. Operating temperature range -10 to +60 °C. No memory effect for maximum battery power. 100-240 V, 50-60 Hz, 90 W rapid charger or 100-240 V, 50-60 Hz, 290 W rapid charger, for shorter charging times (accessories).
- **For cordless and mains operation**
220-240 V/21.6 V, 50-60 Hz, 15 A (output), power supply for mains operation instead of Li-Ion 21.6 V battery (accessory).
- Secure seating of pressing tongs / adaptor tongs by automatic locking.
- **Complete range of ROLLER'S pressing tongs / pressing rings**
for all common pressfitting systems, see page 100-140.
With precisely worked and exactly rounded, system-specific press contour according to the respective pressfitting system. For perfect system-conformant, reliable pressing.
The pressing tongs / pressing rings are made from tenacious, specially hardened special steel and they are therefore highly resistant. For maximum quality demands and long life.
ROLLER'S pressing tongs/pressing rings fit all ROLLER'S 32 kN radial presses and suitable drive units of other makes with 32 kN thrust.
All pressing tongs marked by a * have an additional connection for manual driving by the ROLLER'S Easy-Press drive unit.
All pressing rings S (PR-2B) marked with ** can also be driven with the manual radial press ROLLER'S Easy-Press using the adapter tong Z8, see page 140.
- Confirmations of suitability see page 52.
- Liability acceptance agreements see page 53.

ROLLER'S Multi-Press 22V ACC

Scope of Delivery

Art.-No.

Kč

ROLLER'S Multi-Press 22V ACC Basic-Pack

21.6 V, 32 kN drive unit, with automatic circuit control, pressure monitoring and result display, Li-Ion 21.6 V, 2.5 Ah battery, 100–240 V, 90 W rapid charger.

Basic-Pack in steel case	576010 A220	61 200,00
Basic-Pack in L-Boxx system case	576011 A220	62 400,00

Accessories

ROLLER'S pressing tongs / pressing rings	See page 100–140	
Adaptor tongs for ROLLER'S pressing rings	See page 140	
ROLLER'S Multi-Press 22V ACC drive unit , without battery	576000 A22	44 700,00
Li-Ion 21.6 V, 2.5 Ah battery	571571 A22	7 470,00
Li-Ion 21.6 V, 5.0 Ah battery	571581 A22	8 970,00
Li-Ion 21.6 V, 9.0 Ah battery	571583 A22	11 970,00
100–240 V, 50–60 Hz, 90 W rapid charger	571585 A220	5 070,00
100–240 V, 50–60 Hz, 290 W rapid charger	571587 A220	11 970,00
220–240 V/21.6 V, 50–60 Hz, 15 A power supply , for mains operation instead of Li-Ion 21.6 V battery	571567 A220	11 970,00
ROLLER'S cropping tongs M for threaded bars	See page 142	
ROLLER'S cable shears for electric cables	See page 142	
Steel case with inlay	571290 A	3 190,00
L-Boxx system case with inlay	576345 A	4 240,00
ROLLER'S Worklight 2800 22V cordless LED flood light	see page 173	

