

ROLLER'S Rotor



German Top Quality



Subframe (accessory)

Powerful, proven roll grooving machine for steel pipes and others, DN 25–200 (300), Ø 1–12", wall thickness up to 7.2 mm.

- For fast, economical grooving of pipes for pipe coupling systems. For installation, sprinklers, large scale heating systems, industry, mining.
- Robust roll grooving device with oil hydraulic pressure cylinder as described on page 22.
- Compact drive with robust, maintenance-free gear, with special transmission for ideal force transfer. Proven, powerful 1~ universal motor 230 V, 50–60 Hz, 1,200 W, thermal overload protection and safety switch. Foot switch with coupling for ergonomic working (accessory).
- Easy transport. Total weight only 31 kg.
- For workbench. Subframe or mobile subframe (accessory), for easy transport, optimum working height and stable positioning.

Scope of Delivery

Art.-No.

Kč

ROLLER'S Rotor

Drive unit ROLLER'S King 1 ¼, roll grooving device with manual hydraulic pump, groove depth stop, integrated adjusting disc, 1 pair of grooving rollers (pressure roller, counter pressure roller) 2–6", allen key

347006 A220

79 800,00

ROLLER'S Rotor 2

Drive unit ROLLER'S King 2, roll grooving device with manual hydraulic pump, groove depth stop, integrated adjusting disc, 1 pair of grooving rollers (pressure roller, counter pressure roller) 2–6", allen key

347009 A220

89 400,00

Accessories

Grooving rollers

for steel pipes, INOX pipes, copper pipes etc.

See page 22

Subframe

849315 R

6 270,00

Subframe, mobile

849310 R

10 170,00

Foot switch with coupling

347010 A220


7 200,00

ROLLER'S Assistant


height adjustable material rests

See page 172

ROLLER'S Robot RG

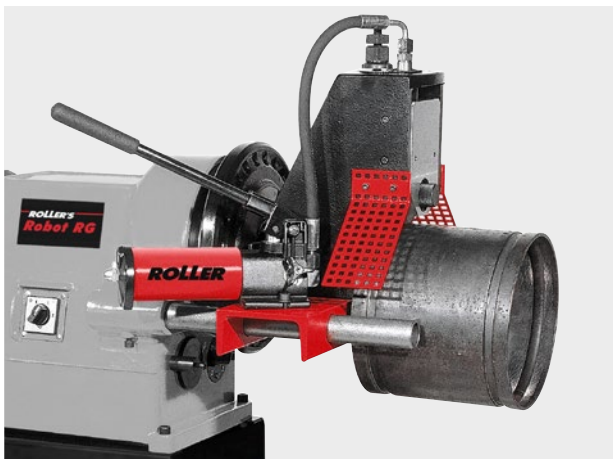

German Top Quality

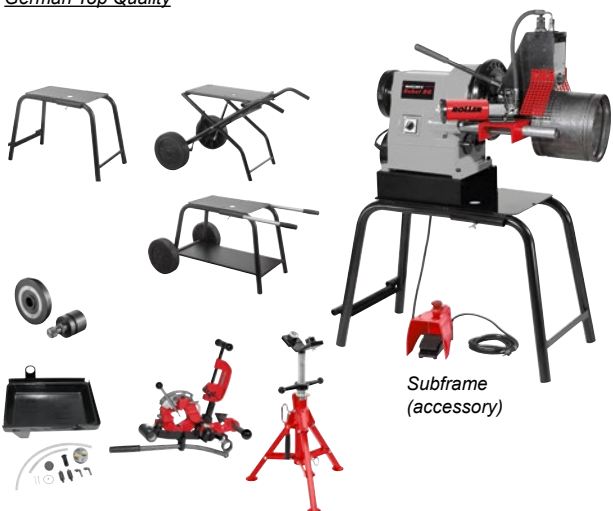

Subframe (accessory)

Proven, powerful roll grooving machine for steel pipes and others, DN 25–300, Ø 1–12", wall thickness up to 7.2 mm.

- for fast, economical grooving of pipes for pipe coupling systems. For installation, sprinklers, large scale heating systems, industry, mining.
- Robust groove roller device with oil hydraulic pressure cylinder as described on page 22.
- Immensely powerful, proven drive unit for harsh building site application. With stable, maintenance-free, high efficiency gear, clamping chuck and centring chuck.
- Choice of 3 proven, powerful motors:
 - 1~ Universal motor 230 V, 50–60 Hz, 1700 W, 53 rpm,
 - Pole-reversible 1~ capacitor motor 230 V, 50 Hz, 2100 W, 2 spindle speeds 52/26 rpm, very quiet running,
 - Pole-reversible 3~ three-phase current motor 400 V, 50 Hz, 2000 W, 2 spindle speeds 52/26 rpm, very quiet running,
- Right and left-hand rotation. Safety foot switch with emergency stop.
- Easy transport. Weight e.g. Robot RG-U complete only 68 kg, weight roll grooving device individually only 26 kg.
- For workbench. Subframe, mobile and folding subframe or mobile subframe with shelf (accessory).

Scope of Delivery

Art.-No.

Kč

ROLLER'S Robot RG

Drive unit with clamping chuck and centring chuck. Roll grooving device with manual hydraulic pump, groove depth stop, integrated setting disc, 1 pair of grooving rollers (pressure roller, counterpressure roller) 2–6", allen key.

U with universal motor

340230 A220

163 200,00

K with condenser motor

340231 A220

173 400,00

D with three-phase current motor

340232 A380

181 500,00

Accessories

Subframe / subframe, mobile and folding / subframe, mobile, with shelf

See page 10

Grooving rollers

for steel pipes, INOX pipes, copper pipes etc.

See page 22

Conversion kit for thread cutting ½–2"

340110 AR

42 000,00

ROLLER'S Assistant

height adjustable material rests

See page 172