

## ROLLER'S **Corso P 10–32 T**



With telescopic spindle



**Compact, robust quality tube cutter for plastic and composite tubes, Ø 10–32 mm, Ø ½–1 ⅜", wall thickness s ≤ 4,5 mm.**

- With space-saving, special smooth action telescopic spindle for fast, easy engagement and simple, right-angled cutting.
- 4 hardened counter pressure rollers, for exact guiding on the pipe and long life.
- Handy, ergonomic rotary handle of metal enables powerful engagement of the spindle.
- Precision, wide cutting wheel bearing on hardened, twist-protected axle ensures right-angled cutting.
- Proven quality cutting wheel made of tenacious special steel for extremely long life. Cutting wheel protected against touching the guide rollers by in-feed limitation.
- Integrated pipe deburrer with specially ground, exchangeable deburring blade.


Designation	Art.-No.	€
<b>ROLLER'S Corso P 10–32 T</b>	290001 A	<b>61,30</b>
<b>Accessories</b>		
<b>ROLLER'S cutting wheel P 10–32, s 4,5</b> for ROLLER'S Corso P 10–40 T	290023 A	20,50

## ROLLER'S **Corso P**



With quick adjustment

German Top Quality

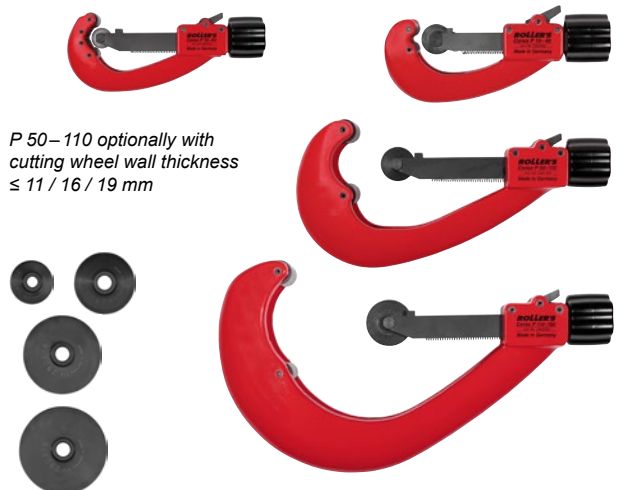

P 50–110 optionally with cutting wheel wall thickness ≤ 11 / 16 / 19 mm

**Very robust quality pipe cutter for plastic and composite tubes, Ø 10–160 mm, Ø ½–6", wall thickness s ≤ 19 mm.**

- Strong, easy grip design.
- Fast positioning of the cutting wheel in both directions. No unnecessary forward and backward turning of the spindle. For fast working.
- Strong spindle, long spindle guide and hardened guide rollers, for exact guiding on the pipe and long life.
- Handy, ergonomic rotary handle of metal enables powerful engagement of the spindle.
- Precision, wide cutting wheel bearing on hardened, twist-protected axle ensures right-angled cutting.
- Proven quality cutting wheel made of tenacious special steel for extremely long life. Cutting wheel protected against touching the guide rollers by in-feed limitation.

Designation	Pipes Ø	Wall thickness s	Art.-No.	€
<b>ROLLER'S Corso P</b>				
with cutting wheel				
<b>P 10–40</b>	10–40 mm / ½–1 ⅝"	7 mm	290050 A	<b>164,00</b>
<b>P 10–63</b>	10–63 mm / ½–2"	7 mm	290000 A	<b>207,00</b>
<b>P 50–110, s 11</b>	50–110 mm / 2–4"	11 mm	290100 A	<b>248,00</b>
<b>P 50–110, s 16</b>	50–110 mm / 2–4"	16 mm	290100 A-S16	<b>252,00</b>
<b>P 50–110, s 19</b>	50–90 mm / 2–3"	19 mm	290100 A-S19	<b>271,00</b>
<b>P 110–160</b>	110–160 mm / 4–6"	16 mm	290200 A	<b>306,00</b>

### Accessories

<b>ROLLER'S cutting wheel P 10–63, s 7</b> for ROLLER'S Corso P 10–40, P 10–63	290016 A	20,50
<b>ROLLER'S cutting wheel P 50–315, s 11</b> for ROLLER'S Corso P 50–110, P 110–160	290116 A	24,90
<b>ROLLER'S cutting wheel P 50–315, s 16</b> for ROLLER'S Corso P 50–110, P 110–160	290216 A	29,70
<b>ROLLER'S cutting wheel P 50–315, s 19</b> for ROLLER'S Corso P 50–110, P 110–160	290316 A	47,90
ROLLER'S cutting wheels for other makes	See page 164	

s = wall thickness in mm