

## ROLLER'S *Rotor*



German Top Quality



Subframe  
(accessory)

**Powerful, proven roll grooving machine for steel pipes and others, DN 25–200 (300), Ø 1–12", wall thickness up to 7.2 mm.**

- For fast, economical grooving of pipes for pipe coupling systems. For installation, sprinklers, large scale heating systems, industry, mining.
- Robust roll grooving device with oil hydraulic pressure cylinder as described on page 22.
- Compact drive with robust, maintenance-free gear, with special transmission for ideal force transfer. Proven, powerful 1~ universal motor 230 V, 50–60 Hz, 1,200 W, thermal overload protection and safety switch. Foot switch with coupling for ergonomic working (accessory).
- Easy transport. Total weight only 31 kg.
- For workbench. Subframe or mobile subframe (accessory), for easy transport, optimum working height and stable positioning.

Scope of Delivery

Art.-No.

€

### ROLLER'S *Rotor*

Drive unit ROLLER'S King 1 ¼, roll grooving device with manual hydraulic pump, groove depth stop, integrated adjusting disc, 1 pair of grooving rollers (pressure roller, counter pressure roller) 2–6", allen key

347006 A220

3.060,00

### ROLLER'S *Rotor 2*

Drive unit ROLLER'S King 2, roll grooving device with manual hydraulic pump, groove depth stop, integrated adjusting disc, 1 pair of grooving rollers (pressure roller, counter pressure roller) 2–6", allen key

347009 A220

3.420,00

Accessories

#### Grooving rollers

for steel pipes, INOX pipes, copper pipes etc.

See page 22

#### Subframe

849315 R

251,00

#### Subframe, mobile

849310 R

407,00

#### Foot switch with coupling

347010 A220


288,00

#### ROLLER'S Assistant


height adjustable material rests

See page 172

## ROLLER'S *Robot RG*

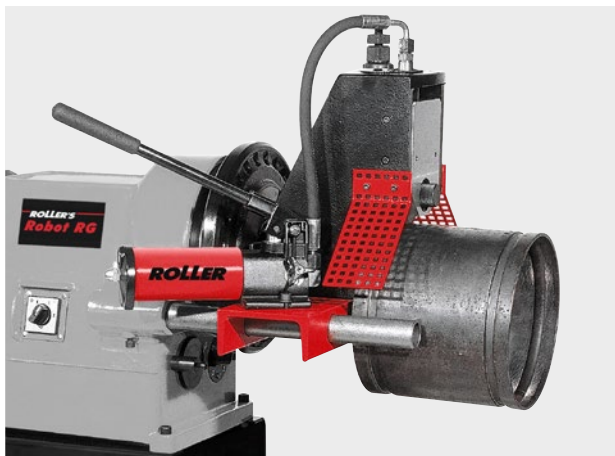

German Top Quality

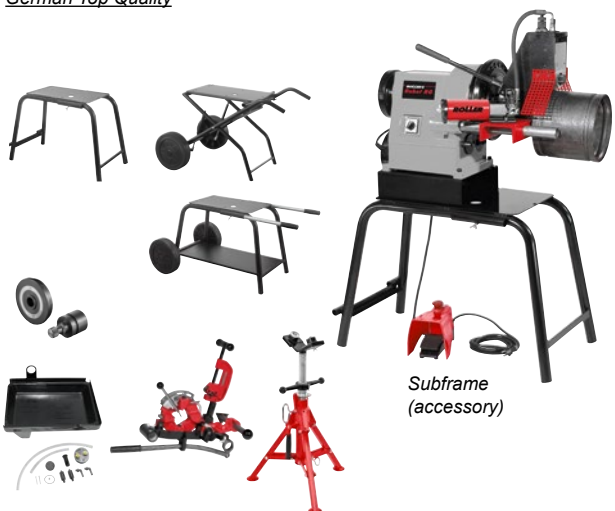

Subframe  
(accessory)

**Proven, powerful roll grooving machine for steel pipes and others, DN 25–300, Ø 1–12", wall thickness up to 7.2 mm.**

- for fast, economical grooving of pipes for pipe coupling systems. For installation, sprinklers, large scale heating systems, industry, mining.
- Robust groove roller device with oil hydraulic pressure cylinder as described on page 22.
- Immensely powerful, proven drive unit for harsh building site application. With stable, maintenance-free, high efficiency gear, clamping chuck and centring chuck.
- Choice of 3 proven, powerful motors:
  - 1~ **Universal motor** 230 V, 50–60 Hz, 1700 W, 53 rpm,
  - Pole-reversible 1~ **capacitor motor** 230 V, 50 Hz, 2100 W, 2 spindle speeds 52/26 rpm, very quiet running,
  - Pole-reversible 3~ **three-phase current motor** 400 V, 50 Hz, 2000 W, 2 spindle speeds 52/26 rpm, very quiet running,
- Right and left-hand rotation. Safety foot switch with emergency stop.
- Easy transport. Weight e.g. Robot RG-U complete only 68 kg, weight roll grooving device individually only 26 kg.
- For workbench. Subframe, mobile and folding subframe or mobile subframe with shelf (accessory).

Scope of Delivery

Art.-No.

€

### ROLLER'S *Robot RG*

Drive unit with clamping chuck and centring chuck. Roll grooving device with manual hydraulic pump, groove depth stop, integrated setting disc, 1 pair of grooving rollers (pressure roller, counterpressure roller) 2–6", allen key.

**U** with universal motor

340230 A220

6.240,00

**K** with condenser motor

340231 A220

6.630,00

**D** with three-phase current motor

340232 A380

6.940,00

Accessories

#### Subframe / subframe, mobile and folding / subframe, mobile, with shelf

See page 10

#### Grooving rollers

for steel pipes, INOX pipes, copper pipes etc.

See page 22

#### Conversion kit for thread cutting ½–2"

340110 AR

1.680,00

#### ROLLER'S Assistant

height adjustable material rests

See page 172