

# ROLLER'S Rotor



German Top Quality



Subframe (accessory)

**Powerful, proven roll grooving machine for steel pipes and others, DN 25–200 (300), Ø 1–12", wall thickness up to 7.2 mm.**

- For fast, economical grooving of pipes for pipe coupling systems. For installation, sprinklers, large scale heating systems, industry, mining.
- Robust roll grooving device with oil hydraulic pressure cylinder as described on page 22.
- Compact drive with robust, maintenance-free gear, with special transmission for ideal force transfer. Proven, powerful 1~ universal motor 230 V, 50–60 Hz, 1,200 W, thermal overload protection and safety switch. Foot switch with coupling for ergonomic working (accessory).
- Easy transport. Total weight only 31 kg.
- For workbench. Subframe or mobile subframe (accessory), for easy transport, optimum working height and stable positioning.

Scope of Delivery Art.-No. €

## ROLLER'S Rotor

Drive unit ROLLER'S King 1 ¼, roll grooving device with manual hydraulic pump, groove depth stop, integrated adjusting disc, 1 pair of grooving rollers (pressure roller, counter pressure roller) 2–6", allen key

347006 A220 **3.060,00**

## ROLLER'S Rotor 2


Drive unit ROLLER'S King 2, roll grooving device with manual hydraulic pump, groove depth stop, integrated adjusting disc, 1 pair of grooving rollers (pressure roller, counter pressure roller) 2–6", allen key

347009 A220 **3.420,00**


### Accessories

<b>Grooving rollers</b> for steel pipes, INOX pipes, copper pipes etc.	See page 22	
<b>Subframe</b>	849315 R	251,00
<b>Subframe, mobile</b>	849310 R	407,00
<b>Foot switch with coupling</b>	347010 A220	288,00
<b>ROLLER'S Assistent</b> height adjustable material rests	See page 172	

# ROLLER'S Robot RG

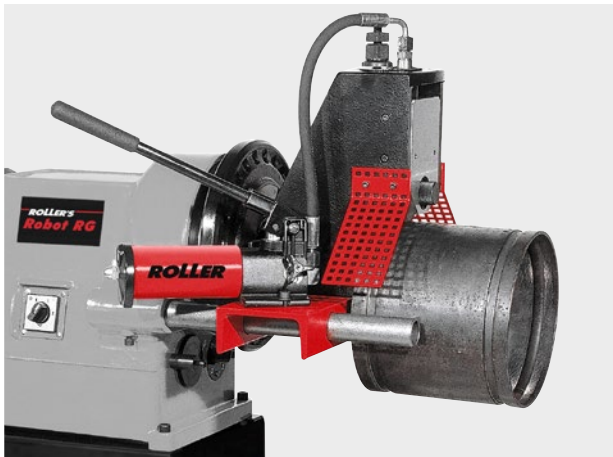

German Top Quality

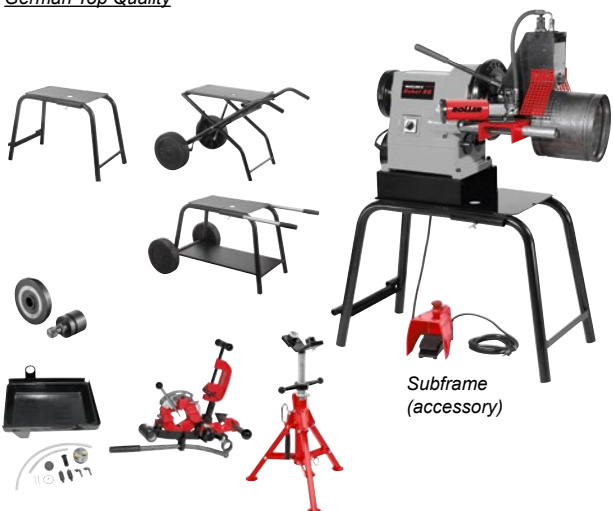

Subframe (accessory)

**Proven, powerful roll grooving machine for steel pipes and others, DN 25–300, Ø 1–12", wall thickness up to 7.2 mm.**

- for fast, economical grooving of pipes for pipe coupling systems. For installation, sprinklers, large scale heating systems, industry, mining.
- Robust groove roller device with oil hydraulic pressure cylinder as described on page 22.
- Immensely powerful, proven drive unit for harsh building site application. With stable, maintenance-free, high efficiency gear, clamping chuck and centring chuck.
- Choice of 3 proven, powerful motors:
  - 1~ **Universal motor** 230 V, 50–60 Hz, 1700 W, 53 rpm,
  - Pole-reversible 1~ **capacitor motor** 230 V, 50 Hz, 2100 W, 2 spindle speeds 52/26 rpm, very quiet running,
  - Pole-reversible 3~ **three-phase current motor** 400 V, 50 Hz, 2000 W, 2 spindle speeds 52/26 rpm, very quiet running,
- Right and left-hand rotation. Safety foot switch with emergency stop.
- Easy transport. Weight e.g. Robot RG-U complete only 68 kg, weight roll grooving device individually only 26 kg.
- For workbench. Subframe, mobile and folding subframe or mobile subframe with shelf (accessory).

Scope of Delivery Art.-No. €

## ROLLER'S Robot RG

Drive unit with clamping chuck and centring chuck. Roll grooving device with manual hydraulic pump, groove depth stop, integrated setting disc, 1 pair of grooving rollers (pressure roller, counterpressure roller) 2–6", allen key.

<b>U</b> with universal motor	340230 A220	<b>6.240,00</b>
<b>K</b> with condenser motor	340231 A220	<b>6.630,00</b>
<b>D</b> with three-phase current motor	340232 A380	<b>6.940,00</b>

### Accessories

<b>Subframe / subframe, mobile and folding / subframe, mobile, with shelf</b>	See page 10	
<b>Grooving rollers</b> for steel pipes, INOX pipes, copper pipes etc.	See page 22	
<b>Conversion kit for thread cutting ½–2"</b>	340110 AR	1.680,00
<b>ROLLER'S Assistent</b> height adjustable material rests	See page 172	