








# ROLLER'S dry-diamond core drilling crowns LS

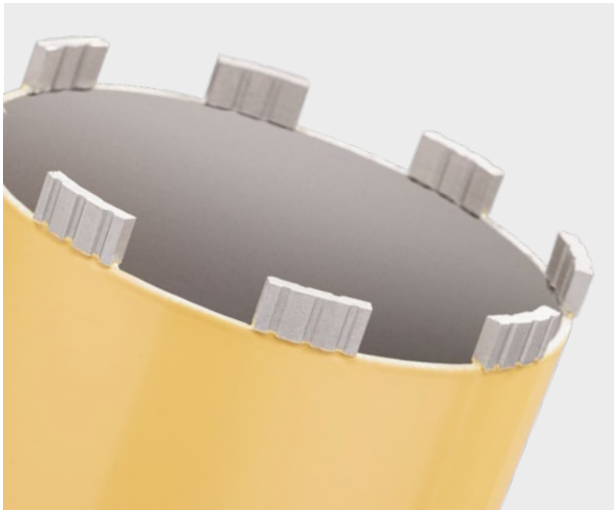

-  ▶ Steel reinforced concrete
-  ▶ Brickwork
-  ▶ Lime sandstone
-  ▶ Poroton
-  ▶ Sandstone
-  ▶ Asphalt
-  ▶ Granite and many more



Accessories for ROLLER'S Centro DP and other suitable makes

**High temperature-resistant dry diamond core drilling crowns, laser-welded. Especially for dry drilling with core drilling machines with micro-pulse technology, hand held or with drill stand. For many materials, e.g. concrete, steel-reinforced concrete, all kinds of masonry, natural stone, asphalt, all kinds of screed. Connection thread UNC 1¼ female, drilling depth 320 mm.**

- Driven by ROLLER'S Centro DP with micro-pulse technology and by suitable drive units of other makes with UNC 1¼ male connection thread.
- Diamond segments with diamonds positioned in the bonding agent. For fast, easy and smooth drilling.
- Laser-welded on fully automatic welding machines for consistent high quality of the weld. High temperature-resistant, even under extreme temperature load, no desoldering of the segments due to overheating.
- High quality diamond segments with special bonding with high diamond content for fast drilling and very long life. Universal for use in steel-reinforced concrete, granite, lime sandstone, sandstone, Poroton, brick, asphalt.
- Use ROLLER'S Protector 2 M for high-performance extraction of the drilling dusts from the drilling gap during dry drilling, see page 207. ROLLER'S Protector 2 M dry and wet extractor is certified for the extraction of health hazardous dusts of dust class M.
- Easy loosening ring, for easy loosening of the drilling crown (accessory).

Designation Ø × drilling depth × connection	Number of segments	Art.-No.	€
--	-----------------------	----------	---

## ROLLER'S dry-diamond core drilling crowns LS

TDKB LS 32 × 320 × UNC 1¼	3	181500 A	172,26
TDKB LS 42 × 320 × UNC 1¼	4	181502 A	160,84
TDKB LS 52 × 320 × UNC 1¼	5	181504 A	171,22
TDKB LS 62 × 320 × UNC 1¼	5	181506 A	186,79
TDKB LS 72 × 320 × UNC 1¼	6	181508 A	211,70
TDKB LS 82 × 320 × UNC 1¼	6	181510 A	229,35
TDKB LS 92 × 320 × UNC 1¼	6	181512 A	258,41
TDKB LS 102 × 320 × UNC 1¼	7	181514 A	264,64
TDKB LS 112 × 320 × UNC 1¼	7	181516 A	279,17
TDKB LS 122 × 320 × UNC 1¼	8	181532 A	320,69
TDKB LS 127 × 320 × UNC 1¼	8	181518 A	332,11
TDKB LS 132 × 320 × UNC 1¼	8	181520 A	341,45
TDKB LS 142 × 320 × UNC 1¼	8	181522 A	365,32
TDKB LS 152 × 320 × UNC 1¼	8	181524 A	406,84
TDKB LS 162 × 320 × UNC 1¼	9	181526 A	431,76
TDKB LS 182 × 320 × UNC 1¼	9	181528 A	476,39
TDKB LS 202 × 320 × UNC 1¼	10	181530 A	504,42

## Accessories

Drilling crown extension 200 mm	180155 R	61,19
Easy loosening ring for easy loosening of the diamond core drilling crown	180015	20,66
Sharpening stone for diamond core drilling crowns	079012	64,67
Single open ended wrench SW 41 for loosening of the drilling crown	079003	38,35