

# ROLLER'S Multi-Press 22 V ACC



Two connections for ROLLER'S manual radial press and ROLLER'S 32 kN radial presses



German Top Quality



Smaller!  
Only 35.5 cm!

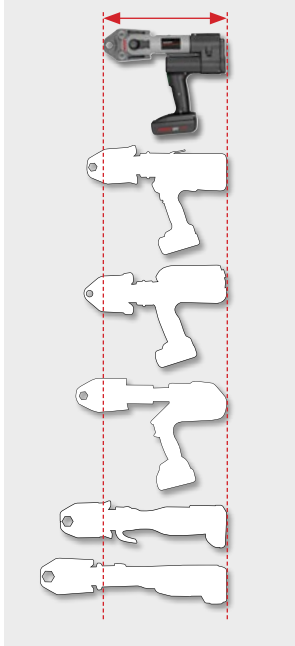

Cropping of threaded bars with ROLLER'S cropping tongs M



Cutting electric cables with ROLLER'S cable shears



Universal, handy, robust hybrid radial press 32 kN for cordless and mains operation, with automatic circuit control, pressure monitoring and result display. Anti-vibration system. For radial pressing joints  $\varnothing 10-108$  (110) mm,  $\varnothing \frac{1}{4}-4$ ". Li-Ion 22 V Technology! Li-Ion 21.6 V, 2.5 Ah battery for approx. 200 pressings per battery charge.

- Universal for all ROLLER'S pressing tongs (except ROLLER'S pressing tongs Mini) and ROLLER'S pressing rings, as well as for suitable pressing tongs / pressing rings of other makes.
- Compact, handy, extra light. Drive unit with battery pack weighs only 3.3 kg.
- Optimum weight distribution for one-hand operation. Drive unit with inserted pressing tongs can be put down on the battery ready to pick up.
- Ergonomically designed housing with soft grip handles.
- Drive unit with pressing tongs V15 only 35.5 cm long. Can therefore be used anywhere, free hand, over head, in confined spaces.
- Tilttable pressing tongs (through 360°) by housing on rotary bearing.
- Pressing process in inching mode with ACC – for work safety, functional safety and operating safety. Automatic return (forced return) after completed pressing.
- **Pressure monitoring and result display**  
Electronic pressure sensor for thrust force monitoring. Pressure evaluation after the pressing process. Result display with 2-coloured white/red LED.
- **Anti-vibration system**  
Special drive technology with weight compensation and soft grip handles, for low-vibration, fatigue-free pressing.
- Several tons feed and pressing force for perfect, split-second pressing. Thrust 32 kN. Robust, powerful, electrohydraulic drive with eccentric piston pump with robust planetary gear and compact high-performance hydraulic system. Constant shear force for constantly reliable pressing.
- Proven, powerful battery motor 21.6 V, 380 W output, safety switch.
- Integrated LED work light for illuminating the work place.
- **Li-Ion 22 V Technology**  
Highly resistant Li-Ion 21.6 V batteries with 2.5, 5.0 or 9.0 Ah capacity, for long service life. Powerful and light. Li-Ion 21.6 V, 2.5 Ah for approx. 200 pressings, 5.0 Ah for approx. 400 pressings, 9.0 Ah for approx. 720 pressings Viega Profipress DN 15 per battery charge\*. Graduated charging status indicator by coloured LEDs. Operating temperature range -10 to +60 °C. No memory effect for maximum battery power. 100-240 V, 50-60 Hz, 90 W rapid charger or 100-240 V, 50-60 Hz, 290 W rapid charger, for shorter charging times (accessories).
- **For cordless and mains operation**  
220-240 V/21.6 V, 50-60 Hz, 15 A (output), power supply for mains operation instead of Li-Ion 21.6 V battery (accessory).
- Secure seating of pressing tongs / adaptor tongs by automatic locking.
- **Complete range of ROLLER'S pressing tongs / pressing rings**  
for all common pressfitting systems, see page 100-140.  
With precisely worked and exactly rounded, system-specific press contour according to the respective pressfitting system. For perfect system-conformant, reliable pressing.  
The pressing tongs / pressing rings are made from tenacious, specially hardened special steel and they are therefore highly resistant. For maximum quality demands and long life.  
ROLLER'S pressing tongs/pressing rings fit all ROLLER'S 32 kN radial presses and suitable drive units of other makes with 32 kN thrust.  
All pressing tongs marked by a \* have an additional connection for manual driving by the ROLLER'S Easy-Press drive unit.  
All pressing rings S (PR-2B) marked with \*\* can also be driven with the manual radial press ROLLER'S Easy-Press using the adapter tong Z8, see page 140.
- Confirmations of suitability see page 52.
- Liability acceptance agreements see page 53.

# ROLLER'S Multi-Press 22V ACC

Scope of Delivery

Art.-No.

€

## ROLLER'S Multi-Press 22V ACC Basic-Pack

21.6 V, 32 kN drive unit, with automatic circuit control, pressure monitoring and result display, Li-Ion 21.6 V, 2.5 Ah battery, 100–240 V, 90 W rapid charger.

<b>Basic-Pack</b> in steel case	576010 A220	<b>2 330,00</b>
<b>Basic-Pack</b> in L-Boxx system case	576011 A220	<b>2 380,00</b>

### Accessories

<b>ROLLER'S pressing tongs / pressing rings</b>	See page 100–140	
<b>Adaptor tongs</b> for ROLLER'S pressing rings	See page 140	
<b>ROLLER'S Multi-Press 22V ACC drive unit</b> , without battery	576000 A22	1 710,00
<b>Li-Ion 21.6 V, 2.5 Ah battery</b>	571571 A22	285,00
<b>Li-Ion 21.6 V, 5.0 Ah battery</b>	571581 A22	342,00
<b>Li-Ion 21.6 V, 9.0 Ah battery</b>	571583 A22	456,00
<b>100–240 V, 50–60 Hz, 90 W rapid charger</b>	571585 A220	193,00
<b>100–240 V, 50–60 Hz, 290 W rapid charger</b>	571587 A220	456,00
<b>220–240 V/21.6 V, 50–60 Hz, 15 A power supply</b> , for mains operation instead of Li-Ion 21.6 V battery	571567 A220	456,00
<b>ROLLER'S cropping tongs M</b> for threaded bars	See page 142	
<b>ROLLER'S cable shears</b> for electric cables	See page 142	
<b>Steel case with inlay</b>	571290 A	122,00
<b>L-Boxx system case with inlay</b>	576345 A	161,00
<b>ROLLER'S Worklight 2800 22V</b> cordless LED flood light	see page 173	

