

ROLLER'S Multi-Press 22 V ACC



Two connections for ROLLER'S manual radial press and ROLLER'S 32 kN radial presses



German Top Quality



Smaller!
Only 35.5 cm!

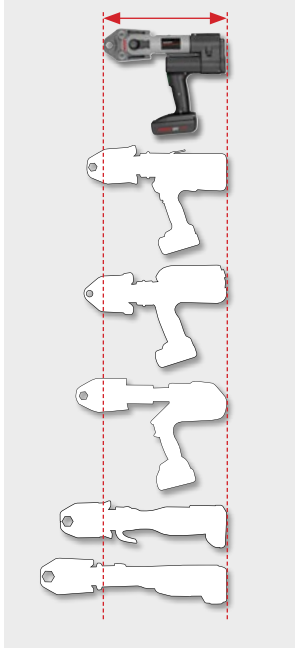

Cropping of threaded bars with ROLLER'S cropping tongs M



Cutting electric cables with ROLLER'S cable shears



Universal, handy, robust hybrid radial press 32 kN for cordless and mains operation, with automatic circuit control, pressure monitoring and result display. Anti-vibration system. For radial pressing joints $\varnothing 10-108$ (110) mm, $\varnothing \frac{1}{4}-4$ ". Li-Ion 22 V Technology! Li-Ion 21.6 V, 2.5 Ah battery for approx. 200 pressings per battery charge.

- Universal for all ROLLER'S pressing tongs (except ROLLER'S pressing tongs Mini) and ROLLER'S pressing rings, as well as for suitable pressing tongs / pressing rings of other makes.
- Compact, handy, extra light. Drive unit with battery pack weighs only 3.3 kg.
- Optimum weight distribution for one-hand operation. Drive unit with inserted pressing tongs can be put down on the battery ready to pick up.
- Ergonomically designed housing with soft grip handles.
- Drive unit with pressing tongs V15 only 35.5 cm long. Can therefore be used anywhere, free hand, over head, in confined spaces.
- Tilttable pressing tongs (through 360°) by housing on rotary bearing.
- Pressing process in inching mode with ACC – for work safety, functional safety and operating safety. Automatic return (forced return) after completed pressing.
- **Pressure monitoring and result display**
Electronic pressure sensor for thrust force monitoring. Pressure evaluation after the pressing process. Result display with 2-coloured white/red LED.
- **Anti-vibration system**
Special drive technology with weight compensation and soft grip handles, for low-vibration, fatigue-free pressing.
- Several tons feed and pressing force for perfect, split-second pressing. Thrust 32 kN. Robust, powerful, electrohydraulic drive with eccentric piston pump with robust planetary gear and compact high-performance hydraulic system. Constant shear force for constantly reliable pressing.
- Proven, powerful battery motor 21.6 V, 380 W output, safety switch.
- Integrated LED work light for illuminating the work place.
- **Li-Ion 22 V Technology**
Highly resistant Li-Ion 21.6 V batteries with 2.5, 5.0 or 9.0 Ah capacity, for long service life. Powerful and light. Li-Ion 21.6 V, 2.5 Ah for approx. 200 pressings, 5.0 Ah for approx. 400 pressings, 9.0 Ah for approx. 720 pressings Viega Profipress DN 15 per battery charge*. Graduated charging status indicator by coloured LEDs. Operating temperature range -10 to +60 °C. No memory effect for maximum battery power. 100-240 V, 50-60 Hz, 90 W rapid charger or 100-240 V, 50-60 Hz, 290 W rapid charger, for shorter charging times (accessories).
- **For cordless and mains operation**
220-240 V/21.6 V, 50-60 Hz, 15 A (output), power supply for mains operation instead of Li-Ion 21.6 V battery (accessory).
- Secure seating of pressing tongs / adaptor tongs by automatic locking.
- **Complete range of ROLLER'S pressing tongs / pressing rings**
for all common pressfitting systems, see page 100-140.
With precisely worked and exactly rounded, system-specific press contour according to the respective pressfitting system. For perfect system-conformant, reliable pressing.
The pressing tongs / pressing rings are made from tenacious, specially hardened special steel and they are therefore highly resistant. For maximum quality demands and long life.
ROLLER'S pressing tongs/pressing rings fit all ROLLER'S 32 kN radial presses and suitable drive units of other makes with 32 kN thrust.
All pressing tongs marked by a * have an additional connection for manual driving by the ROLLER'S Easy-Press drive unit.
All pressing rings S (PR-2B) marked with ** can also be driven with the manual radial press ROLLER'S Easy-Press using the adapter tong Z8, see page 140.
- Confirmations of suitability see page 52.
- Liability acceptance agreements see page 53.

ROLLER'S Multi-Press 22V ACC

Scope of Delivery

Art.-No.

kr

ROLLER'S Multi-Press 22V ACC Basic-Pack

21.6 V, 32 kN drive unit, with automatic circuit control, pressure monitoring and result display, Li-Ion 21.6 V, 2.5 Ah battery, 100–240 V, 90 W rapid charger.

Basic-Pack in steel case

576010 A220 **26 170,00**

Basic-Pack in L-Boxx system case

576011 A220 **26 680,00**

Accessories

ROLLER'S pressing tongs / pressing rings

See page 100–140

Adaptor tongs for ROLLER'S pressing rings

See page 140

ROLLER'S Multi-Press 22V ACC drive unit, without battery

576000 A22 19 110,00

Li-Ion 21.6 V, 2.5 Ah battery

571571 A22 3 200,00

Li-Ion 21.6 V, 5.0 Ah battery

571581 A22 3 840,00

Li-Ion 21.6 V, 9.0 Ah battery

571583 A22 5 120,00

100–240 V, 50–60 Hz, 90 W rapid charger

571585 A220 2 170,00

100–240 V, 50–60 Hz, 290 W rapid charger

571587 A220 5 120,00

220–240 V/21.6 V, 50–60 Hz, 15 A power supply, for mains operation instead of Li-Ion 21.6 V battery

571567 A220 5 120,00

ROLLER'S cropping tongs M for threaded bars

See page 142

ROLLER'S cable shears for electric cables

See page 142

Steel case with inlay

571290 A 1 360,00

L-Boxx system case with inlay

576345 A 1 810,00

ROLLER'S Worklight 2800 22V cordless LED flood light

see page 173

