

ROLLER'S *Rondo* 10–42



German Top Quality

Solid external and internal pipe deburrer for manual operation or electric drive. For stainless steel tubes, steel pipes, copper, brass, aluminium pipes and plastic tubes, Ø 10–42 mm, Ø ½–1 ½ mm.

- Especially for stainless steel tubes of the pressfitting systems.
- Robust metal version, for long life.
- Fast, effortless deburring by 4 specially ground and hardened deburring knives.
- Driver (accessory) for electric drive by screwdriver (with drill chuck) or electric drill (speed up to 300 rpm).

Scope of Delivery	Art.-No.	€
ROLLER'S <i>Rondo</i> 10–42	113810 A	121,45

Accessories		
Driver for ROLLER'S <i>Rondo</i> 10–42	113815 A	52,11

ROLLER'S *Rondo* 3–35




German Top Quality

Robust external and internal deburrer for copper, brass, aluminium pipes and plastic tubes, Ø 3–35 mm Ø ¼–1 ¾ mm.

- Fast, effortless deburring by 3 specially ground and hardened deburring knives.
- Robust housing of impact-resistant, insensitive plastic.

Scope of Delivery	Art.-No.	€
ROLLER'S <i>Rondo</i> 3–35	113900 A	20,03

ROLLER'S *Rondo* Universal

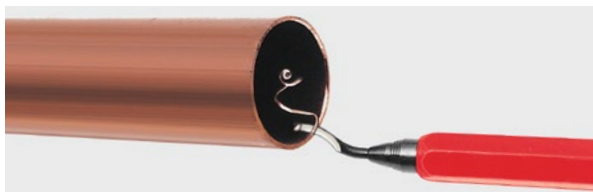

Universal, robust deburrer for copper, steel, brass, aluminium, plastic etc.

- For fast, easy deburring of pipes and edges of various materials.
- With specially ground, exchangeable deburring blade.
- Robust metal version, for long life.
- Hexagonal handle for good grip.

Scope of Delivery	Art.-No.	€
ROLLER'S <i>Rondo</i> Universal	113910 A	26,78

Accessories		
Universal deburring blade, specially ground	113360	7,89

ROLLER'S *Roto* P



German Top Quality

Robust, handy pipe chamfering device for simple chamfering (15°) of plastic tubes Ø 16–250 mm, ¾–10", wall thickness up to PN 16.

- Pipe diameter and wall thickness continuously adjustable.
- Super-sliding prism with dual helix angle for good guiding of small pipe sizes. Made of heavy duty, glass fibre-reinforced polyamide.
- Two adjacent chamfering blades of identical design of which one cuts the chamfer and the other serves as a support for the pipe during chamfering. When the cutting blade has worn out, it can be interchanged with the support part for double life.
- Also ideal for chamfering when muff welding.

Designation	Pipes Ø	Art.-No.	€
ROLLER'S <i>Roto</i> P			
P 16–110	16–110 mm	292110 A	213,83
P 32–250	32–250 mm	292210 A	250,16

Accessories		
Chamfer blade, pack of 2 for ROLLER'S <i>Roto</i> P	292011	85,53

