



# ROLLER'S Protector 2 M/L



Extraction of health hazardous dusts when chasing and cutting

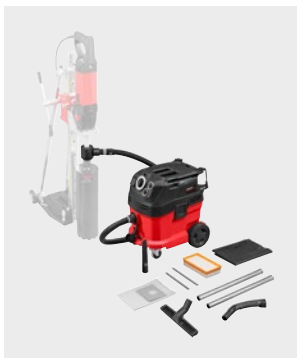

Extraction of health hazardous dusts when dry drilling

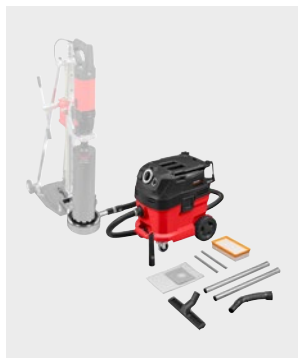

Extraction of drilling sludge when drilling with ROLLER'S drill stands



Dust class L



Dust class M



## Universal, powerful dry and wet extractor with automatic filter cleaning for extracting dusts, dirt and liquids.

- **Certified dust extractor for extraction and collection of health hazardous dusts.** Ideal for dust extraction when chasing, cutting, drilling, core drilling and grinding.
  - ROLLER'S Protector 2 L:** certified according to dust class L in accordance with EN 60335-2-69<sup>1)</sup>, exposure limit/workplace limit > 1 mg/m<sup>3</sup>, penetration level ≤ 0.1 %.
  - ROLLER'S Protector 2 M:** certified according to dust class M in accordance with EN 60335-2-69<sup>1)</sup>, exposure value/work place limit > 0.1 mg/m<sup>3</sup>, penetration level ≤ 0.1 %, with electronic volume flow monitoring, selector switch for adapting the suction power to different suction hose diameters (21, 27, 32, 35, 40 mm) and stopper for the suction hose connection nozzle.
- Compact, handy design, comfortable weight, only 13.5 kg (Protector 2 L) and only 14.2 kg (Protector 2 M). Very flexible by steerable castors and rubber tyred wheels. Lockable castors. Large tank capacity 31 l, for liquids 17 l. On/Off switch with selection for with or without filter cleaning with 15 s or 60 s cycle.
- Powerful dust extractor with innovative, patented, automatic filter cleaning. Flat filter system is cleaned automatically every 15 s or 60 s by powerful shots of air, therefore constantly high extraction force during the entire cleaning/extraction.
- Adapter for connecting a power tool.
- Integrated fittings for fixing a ROLLER'S L-Boxx system case.
- Individually adaptable adapters for connecting a power tool.
- Robust, powerful bypass motor, 1,200 W, with high-power turbine. High suction power, continuously adjustable up to an air volume of ≤ 143 m<sup>3</sup>/h. For optimum adaptation to the required extraction power.
- On/off switch and switch for automatic filter cleaning with integrated green LED to display operation stand-by of the automatic filter cleaning.
- With automatic switch off on reaching the maximum liquid filling level (for electrically conductive liquids).
- Integrated appliance socket for power tools up to 2,200 W with electronic automatic on/off. The extractor switches on/off automatically when the power tool is switched on/off.
- **Antistatic-system** (ROLLER'S Protector 2 M)
  - Static charge is dissipated to the earthed upper section of the extractor by electrically conductive metal suction tube, electrically conductive handle E, electrically conductive suction hose E and electrically conductive suction hose connection nozzle.
- **Dust extraction of dust class M in accordance with EN 60335-2-69**
  - When working with building materials, e.g. concrete, lime sandstone, bricks, fire-proof material, screed, cellular concrete (Ytong) containing quartz, a high degree of fine mineral dust containing quartz is produced which is harmful to health. Inhalation of mineral dust is harmful to the health. The use of at least an industrial dust extractor of dust class M in accordance with EN 60335-2-69 is prescribed for the extraction of health hazardous dusts. Observe the national regulations.

Scope of Delivery

Art.-No.

Kč

### ROLLER'S Protector 2 L Set

Wet and dry extractors of dust class L, with automatic filter cleaning, 1 felt filter bag, 1 flat folder filter PES, suction hose 4,0 m, 2.5 m, handle, 2 metal suction pipes each 0.5 m. Attachment for surfaces wet/dry 300 mm with rollers, brush strips, rubber lips. Attachment for joints, adapter suction hose/power tool.

185600 A220 **23 070,00**

### ROLLER'S Protector 2 M Set

Wet and dry vacuum cleaners of dust class M, with automatic filter cleaning, 1 felt filter bag, 1 PES flat folded filter, 1 polythene bag, suction hose E 4.0 m, handle E, 2 metal suction pipes each 0.5 m. Wet/dry attachment for surfaces 300 mm with rollers, brush strips, rubber lips, attachment for joints, suction hose/power tool adapter

185601 A220 **30 870,00**

#### Accessories

- Felt filter bag**, pack of 5, polyester felt, 3-layer, tear-proof, for wet and dry extraction, M-certified, for normal dirt, fine dusts, abrasive dusts, wet dirt
 

185511 A05	1 630,00
------------	----------
- Wet filter bag**, pack of 5, paper-polyester- woven felt, tear-proof, for wet and dry extraction, for abrasive dusts, wet dirt, liquids
 

185512 A05	2 720,00
------------	----------
- Polythene bag**, pack of 10, polyethylene, for wet and dry extraction of non-health-hazardous dusts, for normal dirt, fine dusts, abrasive dusts, wet dirt, liquids. Prevents soiling of the tank.
 

185513 A10	1 530,00
------------	----------
- Flat folded filter PES**, polyester, nano coated, 1 piece, unrottable, can be washed out with water for wet and dry extraction, M-certified
 

185515 A01	2 460,00
------------	----------
- Suction rotor for sucking off dust, water extractor**

See page 209	
--------------	--

<sup>1)</sup> Observe the national regulations for the collection and disposal of health hazardous dusts.